

KLD JTM45

NORMAL GAIN A1M BRIGHT GAIN A1M BASS A1M MIDDLE B20K TREBLE B250K SPEED C2.2M INTENSITY B250K NFB B10K

Shield wire

Power Transformer

standby

tremolo


Ground

ac in
power
connect to chassis dead metal

Half Power Pentode / Triode

Output Transformer

Twist wires

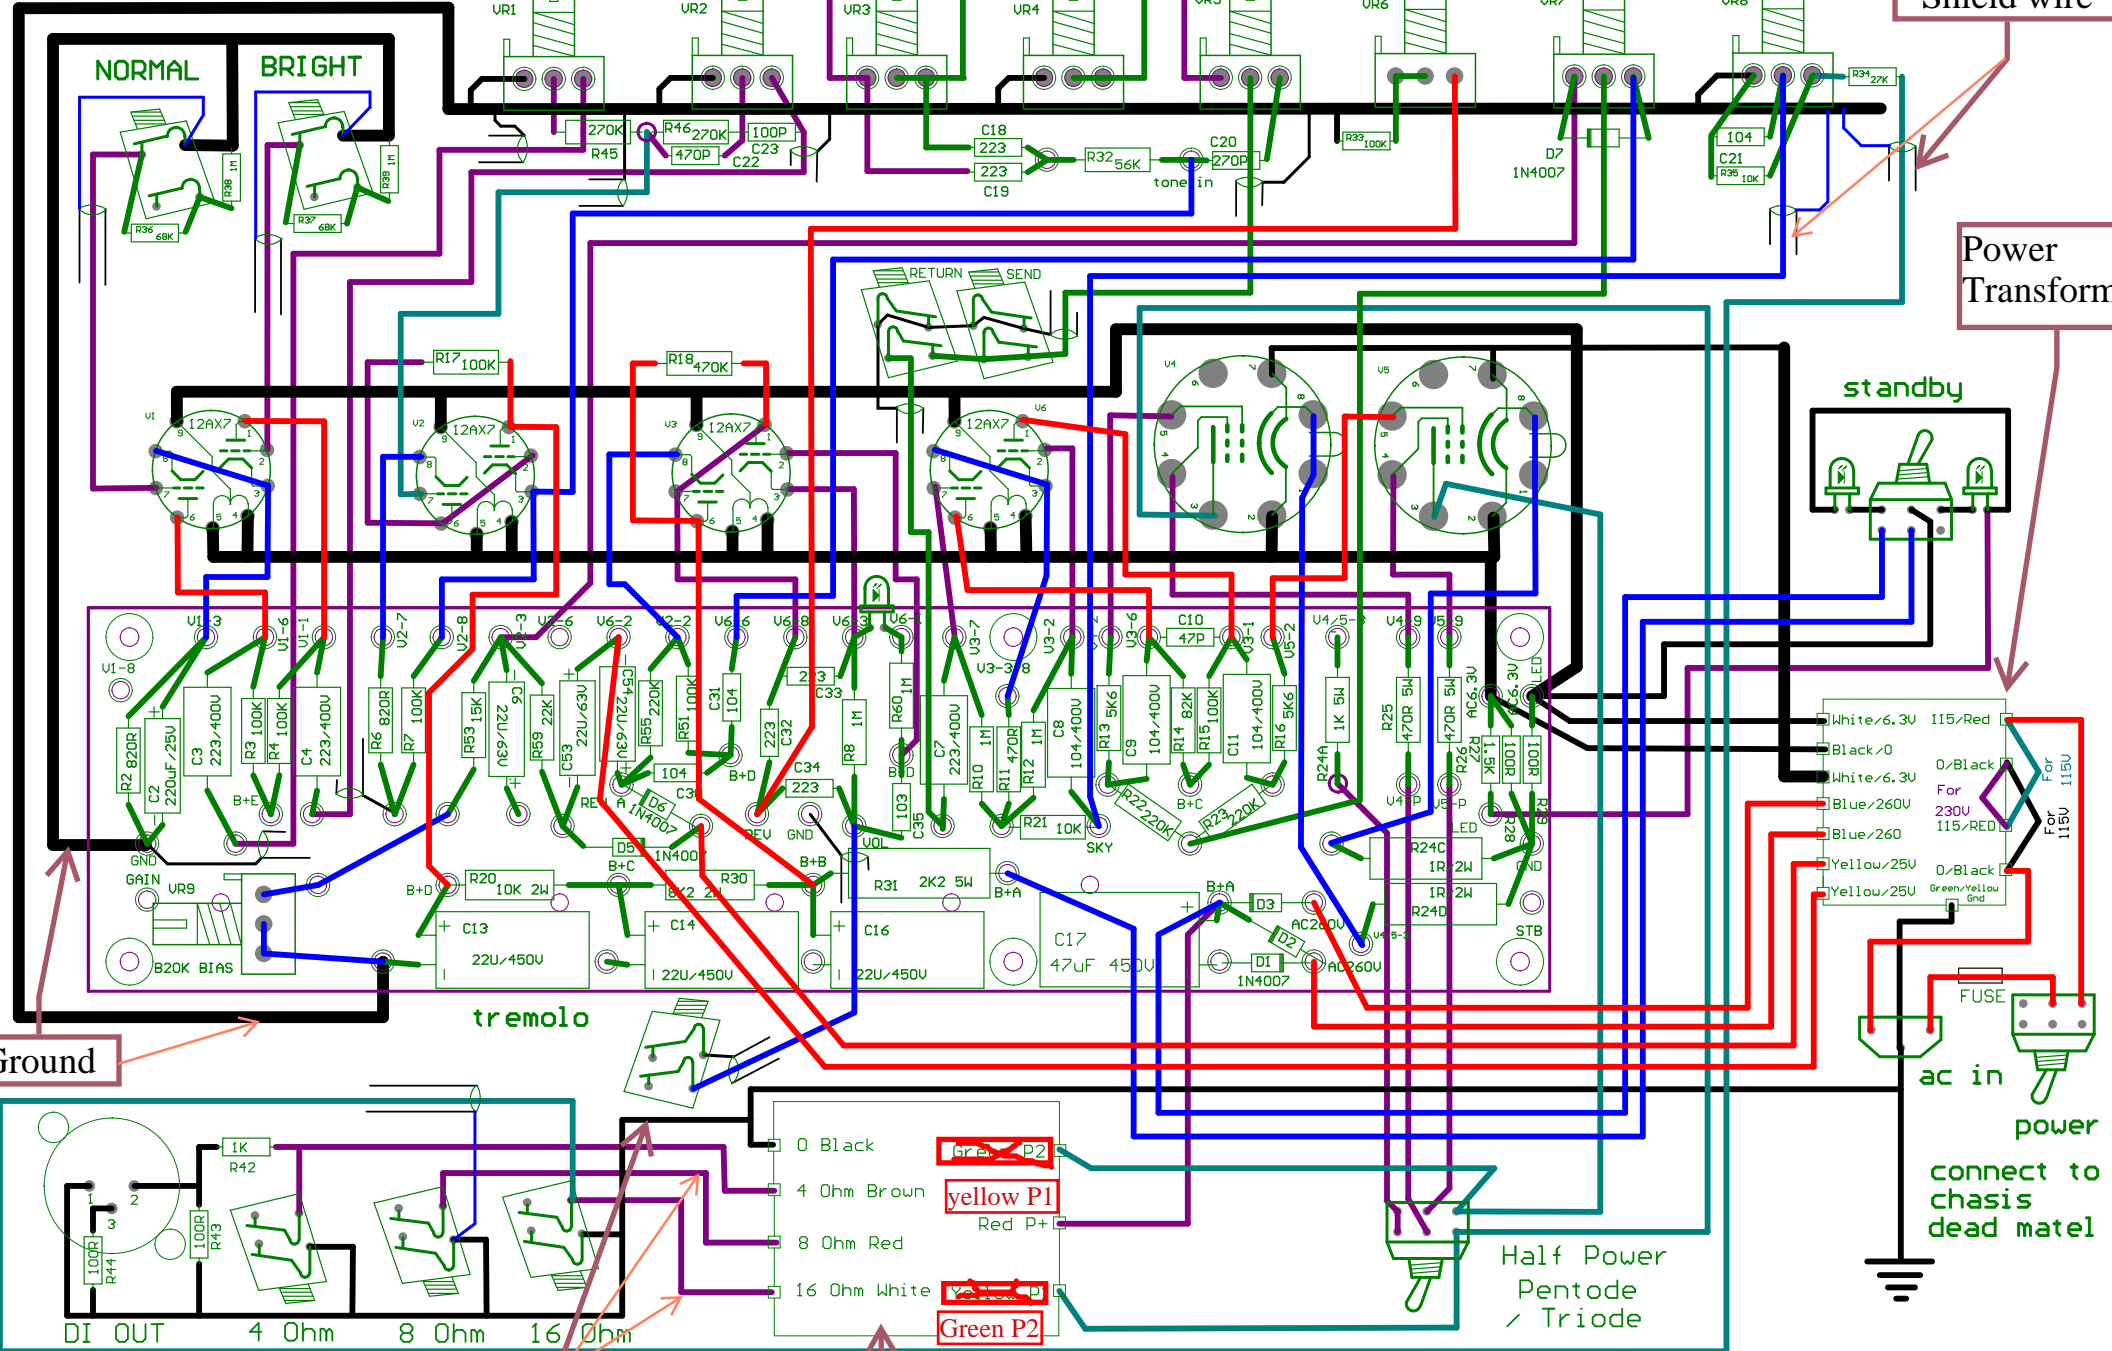

- 0 Black
- 4 Ohm Brown
- 8 Ohm Red
- 16 Ohm White

- ~~Green P2~~
- yellow P1
- Red P+
- ~~Yellow P-~~
- Green P2

- White/6.3V 115/Red
 - Black/0
 - White/6.3V
 - Blue/260V
 - Blue/260
 - Yellow/25V
 - Yellow/25V
- For 115V
For 115V

DI OUT 4 Ohm 8 Ohm 16 Ohm